


09/13/00



UTILITY PATENT APPLICATION TRANSMITTAL

(Only for new nonprovisional applications under 37 CFR 1.53(b))

Attorney Docket No. 1272.C0436
First Named Inventor or Application Identifier
NOBUYUKI NAKAJIMA
Express Mail Label No.



APPLICATION ELEMENTS

See MPEP chapter 600 concerning utility patent application contents.

ADDRESS TO:

Commissioner for Patents
Box Patent Application
Washington, DC 20231

1. ☐ Fee Transmittal Form
(Submit an original, and a duplicate for fee processing)

2. ☒ Specification Total Pages 48

3. ☒ Drawing(s) (35 USC 113) Total Sheets 24

4. ☒ Patent Application Bibliographic
Data Sheet Total Sheets 1

5. ☐ Oath or Declaration Total Pages

- a. ☐ Newly executed (original or copy)
b. ☐ Unexecuted for information purposes
c. ☐ Copy from a prior application (37 CFR 1.63(d))
(for continuation/divisional with Box 18 completed)
[Note Box 6 below]

i. ☐ **DELETION OF INVENTOR(S)**
Signed Statement attached deleting inventor(s)
named in the prior application, see 37 CFR
1.63(d)(2) and 1.33(b).

6. ☐ Incorporation By Reference (useable if Box 5c is checked)
The entire disclosure of the prior application, from which a copy of the
oath or declaration is supplied under Box 5c, is considered as being
part of the disclosure of the accompanying application and is hereby
incorporated by reference therein. The incorporation can only be
relied upon when a portion has been inadvertently omitted from the
submitted application parts.

7. ☐ Microfiche Computer Program (Appendix)

8. ☐ Nucleotide and/or Amino Acid Sequence Submission
(if applicable, all necessary)

- a. ☐ Computer Readable Copy
b. ☐ Paper Copy (identical to computer copy)
c. ☐ Statement verifying identity of above copies

ACCOMPANYING APPLICATION PARTS

9. ☐ Assignment Papers (cover sheet & document(s))

10. ☐ 37 CFR 3.73(b) Statement ☐ Power of Attorney
(when there is an assignee)

11. ☐ English Translation Document (if applicable)

12. ☐ Information Disclosure
Statement (IDS)/PTO-1449 ☐ Copies of IDS
Citations

13. ☐ Preliminary Amendment

14. ☒ Return Receipt Postcard (MPEP 503)
(Should be specifically itemized)

15. ☐ Small Entity ☐ Statement filed in prior application
Statement(s) Status still proper and desired

16. ☐ Certified Copy of Priority Document(s)
(if foreign priority is claimed)

17. ☐ Other: _____

18. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information:

☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No. ____/
Prior application information: Examiner _____ Group/Art Unit: _____

19. CORRESPONDENCE ADDRESS

☒ Customer Number or Bar Code Label 05514 (Insert Customer No. or Attach bar code label here) or ☐ Correspondence address below

NAME			
Address			
City	State	Zip Code	
Country	Telephone	Fax	

CLAIMS	(1) FOR	(2) NUMBER FILED	(3) NUMBER EXTRA	(4) RATE	(5) CALCULATIONS
TOTAL CLAIMS (37 CFR 1.16(c))		16-20 =	0	X \$ 18.00 =	\$0
INDEPENDENT CLAIMS (37 CFR 1.16(b))		8-3 =	5	X \$ 78.00 =	\$390.00
MULTIPLE DEPENDENT CLAIMS (if applicable) (37 CFR 1.16(d))				\$260.00 =	\$0
				BASIC FEE (37 CFR 1.16(a))	\$690.00
Total of above Calculations =					\$1,080.00
Reduction by 50% for filing by small entity (Note 37 CFR 1.9, 1.27, 1.28).					
TOTAL =					\$1,080.00

20. Small entity status

- a. ☐ A small entity statement is enclosed
- b. ☐ A small entity statement was filed in the prior nonprovisional application and such status is still proper and desired.
- c. ☐ Is no longer claimed.

21. ☒ A check in the amount of \$ 1,080.00 to cover the filing fee is enclosed.

22. ☐ A check in the amount of \$ _____ to cover the recordal fee is enclosed.

23. The Commissioner is hereby authorized to credit overpayments or charge the following fees to Deposit Account No. 06-1205:

- a. ☒ Fees required under 37 CFR 1.16.
- b. ☒ Fees required under 37 CFR 1.17.
- c. ☐ Fees required under 37 CFR 1.18.

SIGNATURE OF APPLICANT, ATTORNEY, OR AGENT REQUIRED

NAME Leonard P. Diana (Reg. No. 29,296)

SIGNATURE



DATE

September 12, 2000

096451-09100

Country:: Japan

Fax:: (212) 218-2200

Title Line Three:: METHOD EMPLOYING THE SCANNER

Secrecy Order in Parent Appl.?:: No

Representative Customer Number:: 5514

Priority Claimed:: Yes

APPLICATION FOR UNITED STATES LETTERS PATENT

INVENTOR(S): Nobuyuki NAKAJIMA

INVENTION: IMAGE PROCESSING METHOD OF
GENERATING CONVERSION DATA
FOR A SCANNER AND
CALIBRATION METHOD
EMPLOYING THE SCANNER

S P E C I F I C A T I O N

005169-1241960

This application is based on Japanese Patent Application Nos. 11-263920 and 11-264634 both filed September 17, 1999, the content of which is incorporated hereinto by reference.

5

BACKGROUND OF THE INVENTION

FIELD OF THE INVENTION

10

The present invention relates to an image processing method of generating conversion data for a scanner, and to a calibration method of calibrating a printing apparatus by means of the scanner.

15

DESCRIPTION OF THE PRIOR ART

It is generally known that a printing property of a printing apparatus may vary according to a surrounding condition such as a temperature and a humidity of a surrounding air, in which the printing apparatus is used. Not only the surrounding condition but also use of the printing apparatus for a certain period of time may cause the printing property to vary. In a case of electro-photographic printing apparatus, for instance, a photosensitive property of a photosensitive drum changes according to the surrounding condition and to aging by the

use of the apparatus. As a result, the printing property e.g. a gradation in density observed in a printed image changes from what is desired. It is also known that in a case of an ink-jet printing apparatus, the above-mentioned printing property change is caused by a change in ejection property of a print head, for instance.

A calibration is carried out to deal with such change in the printing property but is not carried only for the change in printing property of an individual printing apparatus as described above. In a case of an information processing system in which a plurality of printing apparatuses are connected with one another through a network, difference in the printing property among the plurality of printing apparatus may present a problem. Thus, also in such a case, it is necessary to conduct the calibration to reduce the printing property variations among the printing apparatus.

A conventional calibration is basically carried out based on the user's instruction input. For example, when the user observes that the gradation in the printed image is not what is desired, the user gives an instruction to execute the calibration on an operation picture of a display and others of the printing apparatus or a personal computer (hereinafter also referred as a PC).

In order to carry out the calibration, the user causes the printing apparatus to print a predetermined chart in which patches of a plurality of density for each color are

disposed, and causes a densitometer, a scanner or others to read the printed chart. Then, based on read data, the user makes, for example, contents of a density correction table used in the image processing for generating printing data renewed. Accordingly, in order to carry out the calibration of the printing apparatus with high accuracy, it is also important to read the chart printed by the printing apparatus correctly.

As a device for reading the chart, there is known the densitometer. The densitometer gives so-called device-independent data such as CIE-1931XYZ color system data, $L^*a^*b^*$ system data or the like (hereinafter the data is called "density") as a result of measuring the chart. This allows the density obtained by measuring the chart to correctly reflect the printing property of the printing apparatus which prints the chart, irrespective of the device used for measurement. The densitometer, however, is relatively expensive; it is not realistic to supply a printer with an expensive densitometer as peripheral equipment, or to make the user purchase the densitometer separately in order to calibrate a low-price printer.

On the other hand, in order to read the chart, a scanner which is a device to input an image and others, or a reading portion of a copying machine have been used, conventionally. However, it is difficult to use the scanner and others as a highly accurate device for reading the chart, as the densitometer. This is because conventionally a

calibration for the scanner and others has not been done so as to be able to conduct the highly accurate density measurement. More specifically, it is relatively difficult to generate a table for converting brightness data obtained by the scanner into the density (hereinafter the conversion is called "brightness-density conversion") with high accuracy.

In addition, when the calibration of the scanner and others can not be carried out with high accuracy, different types of scanners and others may become to have different properties. Then, when such scanners are used for the calibration of the printer, different colors may be reproduced among printers.

SUMMARY OF THE INVENTION

An object of the present invention is to make it possible to carry out a calibration of reading means such as a scanner, which is used as a densitometer, always with high accuracy.

Another object of the present invention is to make it possible to generate dynamically a brightness-density conversion table for the reading means in the calibration of the reading means so that not only a fixed type of apparatus but all types of apparatus may be employed as the reading means.

Still another object of the present invention is to

reduce a load owed by a user, which is required for the calibration of the reading means as much as possible.

In the first aspect of the present invention, there is provided an image processing method of generating a
5 conversion condition for a scanner which is used for reading an image and generating image data, the method comprising the steps of:

obtaining a reading property of an object scanner based on image data obtained by that the object scanner
10 reads a chart; and

generating the conversion condition for the object scanner based on the reading property of the object scanner, a previously prepared reading property of a standard scanner and a previously prepared brightness-density
15 conversion condition for the standard scanner.

In a second aspect of the present invention, there is provided an image processing method of generating a correction condition for a scanner used when calibrating a correction condition for image forming means; the method
20 comprising the steps of:

holding a correction condition for a standard scanner;
judging as to whether the scanner used for calibration is the standard scanner or not;

executing generation of the correction condition for
25 the scanner when the scanner is not judged to be the standard scanner; and

not executing generation of the correction condition

is not judged to be the standard scanner, and the generating means does not execute generation of the correction condition for the scanner when the scanner is judged to be the standard scanner.

5 In a fifth aspect of the present invention, there is provided a calibration method of performing a calibration for a printing apparatus, the method comprising the steps of:

10 preparing a reading device for reading a predetermined image printed by the printing apparatus;

executing the calibration by renewing brightness-density conversion data obtained based on a reading property of the reading device, a previously prepared predetermined reading property and a previously prepared
15 brightness-density conversion condition corresponding to the predetermined reading property; and

measuring density of the predetermined image by means of the reading device which has been subject to calibration by the calibration step; and

20 generating calibration data for the calibration for the printing apparatus based on a result of measurement in the measuring step.

In a sixth aspect of the present invention, there is provided an information processing apparatus for
25 performing a calibration for a printing apparatus, the apparatus comprising:

reading control means for controlling a reading device

for reading a predetermined image printed by the printing apparatus;

executing means for executing the calibration by renewing brightness-density conversion data obtained based on a reading property of the reading device, a previously prepared predetermined reading property and a previously prepared brightness-density conversion condition corresponding to the predetermined reading property; and

generating means for generating calibration data for the calibration for the printing apparatus based on a density measurement result measured by, under the control of the reading control means, the reading device which has been subject to calibration by the executing means.

The above and other objects, features and advantages of the present invention will become more apparent from the following description of embodiments thereof taken in conjunction with the accompanying drawings.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a block diagram showing a configuration of a print system according to a first embodiment of the present invention;

Fig. 2 is a flow chart showing a process of generating a brightness-density conversion table for a scanner in the first embodiment;

Fig. 3 is a flow chart showing a detailed process of generating the table shown in Fig. 2;

Fig. 4 is a diagram showing a relationship of Figs. 4A and 4B; Figs. 4A and 4B are diagrams showing reading charts used for the generation of the brightness-density conversion table for the scanner;

Figs. 5A-5F are diagrams for explaining the detail of the generation of the brightness-density conversion table;

Fig. 6 is a block diagram for explaining the detail of the brightness-density conversion table;

Fig. 7 is a flow chart showing a basic process of a printer calibration according to an embodiment of the present invention;

Fig. 8 is a diagram showing a relationship of Figs. 8A and 8B; Figs. 8A and 8B are diagrams showing charts used in the printer calibration;

Fig. 9 is a diagram showing a relation between an arrangement of data sections in the chart and gradation values;

Figs. 10A, 10B and 10C are diagrams for explaining generation of a calibration table according to an embodiment of the present invention;

Fig. 11 is a flow chart showing a process of the printer including a process of the printer calibration according to an embodiment of the present invention;

Fig. 12 is a flow chart illustrating a process concerning usual printing among the process of the printer;

Fig. 13 is a flow chart showing an application process concerning the respective calibrations for the scanner and the printer according to the first embodiment;

Fig. 14 is a view illustrating an example of a picture
5 displayed in the application;

Fig. 15 is a flow chart showing an application process concerning respective calibrations for a scanner and a printer according to a second embodiment of the present invention;

Fig. 16 is a view illustrating a display picture for
10 selecting the scanner in the above-mentioned process;

Fig. 17 is a flow chart showing a process of generating a brightness-density conversion table for a scanner in a third embodiment of the present invention;

Fig. 18 is a view illustrating an example of a display
15 picture of the process shown in Fig. 17;

Fig. 19 is a block diagram showing a configuration of a print system according to a fourth embodiment of the present invention;

Fig. 20 is a flow chart showing a download process of
20 a brightness-density conversion table which is data for a scanner calibration in the fourth embodiment;

Fig. 21 is a block diagram showing a configuration of a print system according to a fifth embodiment of the
25 present invention; and

Fig. 22 is a flow chart showing a scan process in the fifth embodiment.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Embodiments of the present invention will be described
5 in detail below with reference to the attached drawings.

In the embodiments described below, a Color Laser Beam
Printer (LBP) is used as an example of a printing apparatus
constituting a system, but needless to say, the present
invention can be applied to other printing apparatuses such
10 as a Color Ink Jet Printer.

<First Embodiment>

Fig. 1 is a block diagram showing a configuration of
a print system according to a first embodiment of the
15 present invention.

Although in this example a connection form and a
protocol in a network as shown in Fig. 1 are not referred
to in detail, the present invention may be applied to any
connection form or protocol.

20 The numeral 1 represents a server PC (Personal
Computer), in which software for realizing the system of
the embodiment is installed. The server PC 1 is connected
to a network 5.

The numeral 11 represents a scanner calibration data
25 storing section, which is provided in the server PC 1 to
store scanner calibration data described below. The
numeral 111, within the scanner calibration data storing

section 11, represents an object scanner brightness-density conversion table storing section for storing a brightness-density conversion table, which is provided for a scanner which a user employs in this print system
5 (hereinafter "object scanner") and which is used upon inputting data read by the object scanner. The numeral 112, within the scanner calibration data storing section 11, represents a standard scanner brightness-density conversion table storing section which stores a
10 brightness-density conversion table for a standard scanner made in advance, for example, in a manufacturing stage of this system. The numeral 113, within the scanner calibration data storing section 11, represents a standard scanner property data storing section which stores
15 property data of the standard scanner obtained by that the standard scanner reads a scanner chart in advance. In a scanner calibration described later, newly obtained other information as well as the data previously prepared in the standard scanner brightness-density conversion table
20 storing section 112 and the standard scanner property data storing section 113 are made used together, so that the data in the object scanner brightness-density conversion table storing section 111 is generated finally.

The numeral 2 represents a printer connected to the
25 network 5, which is an apparatus subject to a printer calibration in the system. The printer 2 is constituted so as to be able to print in accordance with an instruction

from each of a plurality of PCs connected through the network. The numeral 21 represents a calibration data storing section constituted inside the printer 2, which is used to store printer calibration data described later on downloading the printer calibration data from the PC 1 into the printer 2.

The numeral 3 represents a scanner connected to the server PC 1, which can be used as a densitometer and measures optical density of patches output by the printer 2, by that the scanner calibration described later in the system is executed. The scanner 3 may be also used for an original purpose, for example, in order to read and input an original document or image. That is, the scanner 3 is the object scanner connected to the system, and when each patch of the chart output by the printer is measured at a process of the printer calibration, the scanner 3 is calibrated by the server PC 1 so as to be able to measure the density stably. More specifically, the scanner calibration data is generated and stored in the object scanner brightness-density conversion table storing section 111 in the scanner calibration data storing section 11. The numeral 4 represents a client PC connected through the network, which generates and edits desired print data, gives an instruction to print the data, and the like. In general, the printer calibration is conducted by a system manager through the server PC 1, while the printing of usual print data is executed by the client PC 4.

A calibration for the object scanner in the above-described print system will be described below. The scanner 3 as the object scanner either is possessed by the user or can be used in the system, and is an all-purpose scanner which can be used for any printer which the user possesses or can be employed for the system. Then, the scanner 3 is calibrated so as to be able to be used as the densitometer capable of reading the chart with high accuracy at a calibration process for the printer 2, which is a process executed as an primary purpose to calibrate printing characteristic of the printer 2 in the print system. Concretely, an object scanner brightness-density conversion table is generated.

Now the generation of the brightness-density
15 conversion table for the scanner 3 will be described with
reference to Figs. 2-6.

In this embodiment, when each patch density of the scanner chart is measured, in order to measure the density of a C patch, R data generated by the scanner 3 is used, in order to measure the density of an M patch, G data is used, in order to measure the density of a Y patch, B data is used, and in order to measure the density of a K patch, G data is used respectively. Accordingly, the brightness-density conversion table for the scanner 3 is, for each of C, M, Y, K, generated as a correspondence relation between the respective values of R, G, B brightness data corresponding to each of C, M, Y, K patches

and density information in the standard scanner
brightness-density conversion table shown in Fig. 1.

Fig. 2 is a flow chart showing an outline process of
generating the brightness-density conversion table, that
5 is, an outline process of the scanner calibration. In Fig.
2, at step S20, the scanner 3 reads a scanner chart. The
scanner chart is reference paper, on which predetermined
patches are printed in advance by means of offset printing
and others. The scanner chart is different from a printer
10 chart output by the printer in a calibration process for
the printer 2 described later referring to Fig. 7.

Figs. 4A and 4B are diagrams showing an example of the
scanner chart. In Figs. 4A and 4B, the numeral 151
represents the entire scanner chart, the size of which is
15 A4. The numeral 152 represents a data section, shown as
a total of 1024 blocks obtained by the data section being
divided into 32 parts throughout both a longitudinal and
a lateral directions in a page. Concretely, each block
forms the patch and the scanner 3 measures the density of
20 each patch. Numbers in the blocks correspond to the
density of the patches as in Figs. 8A and 8B described later,
and are not printed in reality.

The numeral 153 represents discrimination information
for discriminating the chart, and the like. More
25 specifically, the discrimination information being in a
form of an arrow enables the user to know a direction in
which the chart is placed on a manuscript table of the

scanner, and a letter "A" being printed inside the arrow allows the user to discriminate that the chart is the scanner chart. In Figs. 8A and 8B described later, an arrow which is discrimination information of a printer chart is daubed with a certain color (cyan, for example), while in Figs. 4A and 4B the arrow of the scanner chart is daubed with another color (magenta, for instance), which facilitates the user's discrimination. The numerals 154, 155 in Figs. 4A and 4B represent registration marks respectively indicating reading position information.

Fig. 5B is a diagram showing an example of property data obtained when the scanner chart is read by the scanner 3 at step S20 shown in Fig. 2. In Fig. 5B, a horizontal axis represents an input level determined for each patch, while a vertical axis represents the brightness output by the scanner 3. Although an actual number of input levels is 48 for each color, the scanner characteristic 5B is obtained as a relation of 256 levels by means of an approximation formula and others. It should be noted that, in Figs. 5A-5F, only one kind of data is described for the sake of the simplification of description, but needless to say, there are four kinds of data of C, M, Y, K.

The property data obtained as described above of the scanner 3, which is the object scanner, is stored in a memory not shown of the server PC.

When reading of the scanner chart described above is completed, then at step S21 the object scanner

brightness-density conversion table is generated and thereby the scanner calibration process is completed.

Fig. 3 is a flow chart showing a detail of the process of generating the table at step S21. In Fig. 3, first at step S30 the standard scanner property data is read in from the calibration data storing section 11 of the server PC 1. The data, as described above, is previously stored in the standard scanner property data storing section 113. Fig. 5D shows an example of the data, and the data 5D can be obtained by that the scanner chart shown in Figs. 4A and 4B is read in advance by means of the standard scanner.

Next at step S31 an inverse function of the object scanner property data is generated. Fig. 5C is a diagram showing the inverse function. More specifically, a process of Step S31 generates a symmetrical function of the reading property data 5B (Fig. 5B) obtained at step S20 as described above of the scanner 3, which is the object scanner and is, with respect to a line y (brightness) = x (input level). That is, the step S31 generates the inverse function where a relation based on the vertical axis and the horizontal axis shown Fig. 5B is turned over, so that the inverse function data 5C shown in Fig. 5C can be generated.

At step S32 an inter-scanner brightness correspondence table is generated. The inter-scanner brightness correspondence table 5E shown in Fig. 5E is obtained by combining the inverse function 5C (Fig. 5C)

of the object scanner property obtained and the standard scanner property 5D (Fig. 5D), which are obtained at the previous steps S31, S30, respectively. The table 5E, as also shown in Fig. 6, is a table which makes an input
5 brightness for the inverse function of the object scanner property correspond to an input brightness for the standard scanner property. This table can be also obtained by an approximation formula and others.

Next, at step S33 the standard scanner brightness-
10 density conversion table is read from the calibration data storing section 11 of the server PC 1. The table is stored in advance in the standard scanner brightness-density conversion table storing section 111 of the storing section 11. An example of the table data is shown in Fig. 5A. The
15 data can be obtained in the following way: the scanner chart described above in Figs. 4A and 4B is read in advance by the standard scanner and the densitometer, and the brightness detected by the standard scanner and the density read by the densitometer, which are normalized in a range
20 of 0 to 255, are made to correspond to each other. In other words, the density obtained by the conversion using the brightness-density conversion table 5A, which is made correspond to the standard scanner, becomes a device-independent value like the density detected by the
25 densitometer.

It is needless to say that the chart for the scanner calibration is not limited to that shown in Figs. 4A and

calibration again. The scan of the scanner is carried out through a scanner driver usually formed on the PC 1, though the detail thereof will not be mentioned here. Through scanner driver, a scanning resolution, designation of an input area and so on are set.

The calibration for the printer in this embodiment using the scanner 3 calibrated as described above will be described with reference to a flow chart shown in Fig. 7.

First at step S41 the server PC 1 gives an instruction to output a chart of patches to the printer 2 through the network, and then the printer 2 outputs the chart. Supposing that a plurality of printers is connected through the network, the server PC 1 specifies the printer which is subject to the calibration and outputs the chart. These processes are executed in accordance with network management rules, but they will not be mentioned here.

An example of the chart is shown in Figs. 8A and 8B. In Figs. 8A and 8B, the numeral 61 represents the entire printer chart, the size of which is A4. The numeral 62 represents a data section for detecting the density property of the printer, consisting of the total of 1024 blocks obtained by that the data section is divided into 32 parts throughout both a longitudinal and a lateral directions in a page. Concretely, each block forms a patch, and numbers in the blocks are not printed in reality as in Figs. 4A and 4B. In the lateral direction, blocks are arranged separately for each of base colors of a print toner,

inside the arrow allows the user to discriminate that the chart is a printer chart.

The numerals 64, 65, 66 in Figs. 8A and 8B represent registration marks for detecting whether the chart is placed correctly on the manuscript table of the scanner.

The printer chart is output from the printer 2 based on the instruction through the network from the server PC 1 as described above, however it may be possible to have the printer 2 possess the information of constituting the patch data of the format and to generate the patch data based on the information according to the instruction from the PC 1, or to generate the patch data by sending the patch data constitution information to the printer 2 from the PC 1. The patch data constitution information is dependent on a command system possessed by the printer 2, but will not be mentioned here.

After the patches are printed as described above, at step S42 the density of the output patches is measured by means of the scanner 3. More specifically, the scanner 3 generates a brightness signal value of R, G, B concerning each patch and gives the value to the PC 1. On receiving input values, the PC 1 calculates the average of input values of four points for the highlight side and the average of input values of eight points for the shadow side, based on the arrangement of the blocks of the patch, and thereby obtains 48 gradations of R, G, B signal values for each color of C, M, Y, K. These R, G, B brightness signals are

converted by means of the above described brightness-
density conversion table 5F into density signals to obtain
48-gradations brightness signals. Each patch shown in
Figs. 8A and 8B is read by the scanner 3 used as the
5 densitometer, and thereby it becomes possible to obtain
the density value correctly reflecting an output
characteristic of the printer 2.

Then at step S43 the server PC 1 generates the
calibration table. The process will be described with
10 reference to Figs. 10A-10C. Fig. 10A shows a property
obtained from the 48-gradations density value for each
color obtained at step S42. For the sake of simplicity,
the process for only one color is illustrated here, but
the same process is carried out for four colors of C, M,
15 Y, K in reality. Fig. 10A illustrates a curve showing a
relation between input and output, which is obtained by
an interpolation calculation for the 48 gradation density
values. Although the property is as shown in Fig. 10A,
an ideal density property is what is represented by a linear
20 curve as shown in Fig. 10C. In order to approximate the
present density property (Fig. 10A) to the ideal density
property (Fig. 10C), the inverse function shown in Fig.
10B is set as contents of the calibration table. In other
words, by applying the function shown in Fig. 10B to the
25 property shown in Fig. 10A, the input and output relation
shown in Fig. 10C is obtained as a result. The calibration
table thus obtained is used for a density correction in

an image processing in the printer 2 as described later referring to Fig. 12.

At step S44 the server PC 1 downloads the calibration table data obtained as described above to the printer 2 through the network, and then completes the process. In the downloading, the sever PC specifies the object printer supposing the case in which a plurality of printers are connected through the network as in the case in which the patch data is output. The downloaded calibration data is stored in the calibration data storing section 21. A downloading command and others in this process are dependent on the command system of the printer 2, but will not be mentioned here.

Fig. 11 is a flow chart showing a process executed by the printer 2 and a process on receiving download data from the server PC 1. At step S70 of Fig. 11, a judgment is made whether the data is received or not. When the data is not received, step S70 is repeated. When the data is received, the data is analyzed at step S71. The analysis result is judged at step S72; when the data is judged to be a calibration download command, the calibration data is stored in the calibration data storing section 21 at step S73 as described above. When the data is judged not to be the calibration download command at step S72, corresponding processes to the judges are carried out at step S74.

Usual print data is sent to the printer 2 from an

Step S88 provides a button for moving to step S89, and if the user presses the button, the processing moves to step S89. Step S89 displays a picture for enabling the measurement data to be saved, and for saving the scan data
5 measured at step S87. The saved file can be used in a process using the existing measurement data described below. When the process of Step S89 is completed, the process returns to step S88. Then at step S810 the process completion picture is displayed. If the user designates
10 the completion of the application on the picture, the process is completed, while if the user designates the return to the main picture, the process returns to step S81.

When the user chooses "Open the measurement data" and
15 presses "Next" on the main picture in step S81, the process proceeds to step S83 and there appears a picture for indicating the measurement data. Here, when the user presses a "reference" button, a picture for reading the measurement data appears at step S86. This picture
20 enables the user to search the measurement data in detail. The measurement data is the data file saved at step S89. Then at step S88 the calibration is applied. The subsequent processes are the same as described above.

When the user selects "Delete the download data" and
25 presses "Next" on the main picture in step S81, at step S84 the calibration data stored in the calibration data storing section 21 of the printer 2 is deleted. This

process is carried out in accordance with an instruction by a command from the PC 1 to the printer 2, but the command is not mentioned here.

Then the picture changes to the completion picture
5 display process step S810. The subsequent processes are as described above.

As described above, in this embodiment, supposing that there are a plurality of printers connected through the network, it becomes necessary to designate an object
10 printer; concretely, the designation is done on the UI when the patch data is printed at step S82 in Fig. 13. The application is capable of giving an instruction to output the patch and downloading the calibration data to the designated printer.

As can be seen from the above description, according
15 to the embodiment, by calibrating a printer by means of a scanner capable of reading with as high accuracy same as a densitometer, it becomes possible to perform color printing always stably.

It also becomes possible to use any type of scanner
20 as an object scanner. Accordingly it becomes possible to provide calibration conditions with high accuracy using existing devices without particularly purchasing an expensive densitometer and others. And it also becomes
25 possible to use more than one type of scanners.

<Second Embodiment>

A second embodiment of the present invention will be described in detail below.

In the above-described first embodiment, even if the standard scanner is used as the object scanner for the scanner calibration, the print system is adapted to execute a process of the scanner calibration. In contrast in this embodiment, if the standard scanner is used as the object scanner, the scanner calibration is skipped and the subsequent steps are executed using a standard scanner brightness-density conversion table generated in advance.

Accordingly, a configuration of the printer calibration in this embodiment is basically the same as in the first embodiment, but differs from the first embodiment in following points. In the embodiment a judgment is made as to whether the scanner for use is a standard scanner or not. When the scanner is judged to be the standard scanner, the step of the scanner calibration is skipped, and then the subsequent steps are executed using the standard scanner brightness-density conversion table generated in advance. Also a control method for the above configuration different from that of the first embodiment.

The different points from the first embodiment will be described below.

Fig. 15 is a flow chart showing a process of a user interface (UI) in a PC 1 of a print system according to the second embodiment of the present invention, and shows

similar process to Fig. 13.

At step S131 a main picture is displayed. Fig. 14 shows an example of the main picture as described above. The processing is basically structured to cause other
5 pictures to appear when buttons "Next," "Return," "Cancel," "Help" shown in Fig. 14 are pressed. The main picture shown in Fig. 14 provides three selection menus of "New," "Open the existing measurement data," "Delete the download data." If "New" is chosen and "Next" is
10 pressed, the process moves to step S132. At step S132 the patch data is output to the printer 2. Then at step S135 a judgment is made as to whether the standard scanner is selected as an object scanner or not at that point. Fig. 16 shows an example of a scanner selection picture. The
15 picture is displayed after the main menu (picture). In Fig. 16 the numeral 141 represents a scanner selection dialogue, and the user can select an arbitrary scanner by means of a pull-down menu 142. In the process of step S135 a judgment is made as to whether the selected scanner is
20 the standard scanner or not based on a name of the selected scanner.

When it is judged that the selected scanner is not the standard scanner, at step S136 the scanner 3 is calibrated by the PC 1 as described above, and the brightness-density
25 conversion table 5F peculiar to the scanner 3 is generated.

On the other hand, when the selected scanner is judged to be the standard scanner at step S135, the process of

step S136 is skipped, and the brightness-density conversion table 5F is loaded from the standard scanner brightness-density conversion table storing section 112 shown in Fig. 1 and is used in the subsequent steps.

5 Then at step S138, as described above, the patch is measured by means of the scanner 3 and the brightness-density conversion table 5F, and at step S139 the calibration is applied.

10 In the second embodiment, the same processes as in the first embodiment are executed except the processes in which a judgment is made as to whether the used scanner is the standard scanner or not, and when the used scanner is judged to be the standard scanner, the step of the scanner calibration is skipped, and then the subsequent steps are
15 executed using the standard scanner brightness-density conversion table generated in advance; thus the description will be omitted.

20 As can be seen from the above description, according to the second embodiment, the scanner calibration step can be skipped when the standard scanner is used as the object scanner, and thereby the efficiency of the processes can be improved.

25 According to the first and second embodiments, it is possible to calibrate a reading means such as a scanner with high accuracy, and to use the reading means as a reading means such as a densitometer, which can detect density with high accuracy.

It is also possible to generate dynamically a brightness-density conversion table for a reading means in the calibration of the reading means so that not only a fixed type of device but all purpose types of apparatus
5 may be employed as the reading means.

In addition, it is possible to reduce burden of the user required for the calibration of a reading means as much as possible.

10 <Third Embodiment>

A third embodiment of the present invention is directed to a configuration that, in the scanner calibration similar to that in the first and second embodiments, if the measurement result, which is obtained
15 by reading the chart shown in Figs. 4A and 4B, is inappropriate for the subsequent generation of the brightness-density conversion table, processes such as doing again of reading are executed.

Fig. 17 is a flow chart showing a sequence of processes of generating the brightness-density conversion table in this embodiment. At step S51 the predetermined patches shown in Figs. 4A and 4B is read by means of the scanner
20 3 which is an object of the scanner calibration, and thereby brightness signal values are obtained.

At step S52 a measurement result obtained in step S51 is displayed as shown in Fig. 18. In order to measure the density with high accuracy by using a scanner as similarly
25

in predetermined memories.

At step S54 based on the brightness signals R, G, B read at step S51 and the standard scanner information loaded at step S53, as described above, a brightness-density conversion table, which is used for reading with use of the scanner on the printer calibration, is generated. This process completes the calibration of the scanner 3.

<Fourth Embodiment>

10 In the first to third embodiments, as described as to Fig. 13, for example, each time calibration for the printer is performed, generation of the brightness-density conversion table by using the scanner calibration patch and the corresponding density data is executed. In
15 contrast in this embodiment, the brightness-density conversion table is prepared in advance for each type of scanner, which may be employed, and the brightness-density conversion table appropriate for the type of scanner used in the system is downloaded and used.

20 Fig. 19 is a block diagram showing a configuration of a print system according to this embodiment.

The configuration of this embodiment is basically the same as the configuration shown in Fig. 1 according to the first to third embodiments. The difference is that in this
25 embodiment there are a plurality of scanner calibration data storing sections in accordance with the type of scanners which the server PC 1 may employ. In the example

and others, but the detail thereof will not be mentioned here.

Then at step S122 the brightness-density conversion table in accordance with the type of scanner specified as
5 above is read from the storing section shown in Fig. 19 and is downloaded.

Thus by preparing in advance the scanner calibration data for the type of scanners which may be used, and in the process of patch reading on the printer calibration
10 by downloading the scanner calibration data corresponding to the scanner for doing the reading and thereby executing the brightness-density conversion. Thereby, it becomes possible to performing reading of the patch where correct reflecting of the patch density can be realized, and to
15 shorten the time required for the scanner calibration process.

Although in the fourth embodiment scanner calibration data is prepared for each type of scanners, this is not the only possibility of the present invention; it is
20 possible to prepare the scanner calibration data for each individual scanner of the same type, for instance.

<Fifth Embodiment>

In this embodiment, the scanner itself possesses the
25 scanner calibration data storing section. Then the calibration data stored in the storing section may be generated each time the printer is calibrated as in the

first to third embodiments, or may be obtained and stored in advance as in the fourth embodiment.

Fig. 21 is a block diagram showing a configuration of a print system according to this embodiment. The system in this embodiment is constituted basically the same as the system shown in Fig. 1 of the first embodiment; the difference is that the scanner 3 stores the scanner calibration data in this embodiment.

In this embodiment too, under control of the server PC 1, the printer 2 is calibrated by the same procedure described as to Fig. 7. The difference is that when the patch is read at step S42, the scanner calibration data is loaded from the storing section 31 of the scanner 3 in this embodiment.

Fig. 22 is a flow chart showing the processes related to the above difference. First at step S141 a judgment is made as to whether the scan is a scan for measuring patch density for the purpose of the printer calibration or not. This judgment can be made based on information such as a command parameter for giving an instruction to execute the scan from the server PC 1, and others, but the detailed description thereof will not be mentioned here.

At step S141 when the scan is judged not to be a scan for measuring a patch, at step S144 usual scan is carried out, and then at step S145 the reading data is transferred to the PC 1. At step S141 when the scan is judged to be the scan for measuring a patch, at step S142 the scanner

calibration data is loaded from the storing section 31 of the scanner 3, and then at step S143 the scan for measuring the patch is carried out using the brightness-density conversion table. Then the data read by this scan is transferred to the PC 1.

According to this embodiment, since the scanner calibration data is stored in the scanner connected to the system, it is possible to omit such processes as the specification of the scanner when the reading is executed.

Although the processes related to the calibration such as the generation of the calibration data are executed by the server PC in the above-described embodiments, it is possible to have the applications operate in the client PC and to have the PC execute the processes.

And although in the above-described embodiments the calibration table generated in the server PC is transferred to the printer and is used in an image processing of the printer, this is not the only possibility of the present invention. For instance, in the case of a host apparatus such as a server PC generating binarized bit map data, the host apparatus may store a calibration table, for example, a γ table which is calibrated.

<Other Embodiment>

The present invention may be applied to a system consisting of a plurality of devices (such as a host computer, an interface device, a reader and a printer) or

to single device (such as a copying machine and a facsimile).

The present invention also includes a configuration in which a computer in an apparatus or system, which is
5 connected with a variety of devices so as to realize functions of the foregoing examples shown in Figs. 2, 3, 11-13, 15, 20 and 22, is loaded with a program code of software and in which these devices are operated according to the program stored in the computer (CPU or MPU).

10 In this case, the software program code itself realizes the functions of these examples. The program code and a means for loading the program code to the computer, such as a storage medium containing a program code, constitute the present invention.

15 The storage media for storing the program code include floppy disk, hard disk, optical disk, magneto-optical disk, CD-ROM, magnetic tape, nonvolatile memory card and ROM.

The program code is included in the present invention not only when the functions of the aforementioned examples
20 are realized by executing the program code loaded into the computer, but also when these functions are realized by the program code in cooperation with an OS (operating system) or application software running on the computer.

25 It is needless to say that the present invention further includes a configuration in which the program code is stored in a memory mounted on a computer's function extension board or a function extension unit connected to

the computer and the CPU in the function extension board or unit executes a part or all of the actual processing according to the instructions of the program code to realize the functions of the preceding examples.

096121-01770

WHAT IS CLAIMED IS:

1. An image processing method of generating a conversion condition for a scanner which is used for reading an image and generating image data, said method comprising the steps of:

obtaining a reading property of an object scanner based on image data obtained by that the object scanner reads a chart; and

generating the conversion condition for the object scanner based on the reading property of the object scanner, a previously prepared reading property of a standard scanner and a previously prepared brightness-density conversion condition for the standard scanner.

2. An image processing method as claimed in claim 1, wherein said generating step combines an inverse function of input level-brightness conversion property of the object scanner, an input level-brightness conversion property of the standard scanner, and the brightness-density conversion condition of the standard scanner so as to generate the conversion condition for converting an input level in the object scanner to density data in the standard scanner.

3. An image processing method as claimed in claim 1 further comprising the steps of:

inputting image data obtained by that the object scanner reads a chart formed by image forming means;

converting the input image data to density data by using the conversion condition generated; and

5 calibrating a correction condition for the image forming means based on the density data.

4. An image processing method of generating a correction condition for a scanner used when calibrating a correction condition for image forming means; said method comprising the steps of:

 holding a correction condition for a standard scanner;
 judging as to whether the scanner used for calibration is the standard scanner or not;

15 executing generation of the correction condition for the scanner when the scanner is not judged to be the standard scanner; and

 not executing generation of the correction condition for the scanner when the scanner is judged to be the
20 standard scanner.

5. An image processing apparatus for generating a conversion condition for a scanner which is used for reading an image and generating image data, said apparatus
25 comprising:

 means for obtaining a reading property of an object scanner based on image data obtained by that the object

scanner reads a chart; and

generating means for generating the conversion
condition for the object scanner based on the reading
property of the object scanner, a previously prepared
5 reading property of a standard scanner and a previously
prepared brightness-density conversion condition for the
standard scanner.

6. An image processing apparatus comprising:

10 generating means for generating a correction
condition for a scanner used when calibrating a correction
condition for image forming means;

holding means for holding a correction condition for
a standard scanner; and

15 judging means for judging as to whether the scanner
used for calibration is the standard scanner or not;

wherein said generating means executes generation of
the correction condition for the scanner when the scanner
is not judged to be the standard scanner, and said
20 generating means does not execute generation of the
correction condition for the scanner when the scanner is
judged to be the standard scanner.

7. A storage medium storing a program readably by a
25 computer, the program being for realizing an image
processing method of generating a conversion condition for
a scanner which is used for reading an image and generating

9. An image processing method as claimed in claim 1,
further comprising the step of:

informing a user of that the reading property is
inappropriate when the reading property obtained by said
5 obtaining step is inappropriate for generation of the
conversion condition in said generating step.

10. An image processing method as claimed in claim 9,
further comprising the step of:

10 displaying reading property obtained by said
obtaining step by means of a predetermined display device.

11. An image processing apparatus as claimed in claim 5,
further comprising:

15 means for informing a user of that the reading property
is inappropriate when the reading property obtained by said
means for obtaining is inappropriate for generation of the
conversion condition by said generating means.

20 12. An image processing apparatus as claimed in claim 11,
further comprising:

display means for displaying reading property
obtained by said means for obtaining.

25 13. A calibration method of performing a calibration for
a printing apparatus, said method comprising the steps of:
preparing a reading device for reading a predetermined

image printed by the printing apparatus;

executing the calibration by renewing brightness-
density conversion data obtained based on a reading
property of the reading device, a previously prepared
5 predetermined reading property and a previously prepared
brightness-density conversion condition corresponding to
the predetermined reading property; and

measuring density of the predetermined image by means
of the reading device which has been subject to calibration
10 by said calibration step; and

generating calibration data for the calibration for
the printing apparatus based on a result of measurement
in said measuring step.

15 14. A calibration method as claimed in claim 13, wherein
renewing brightness-density conversion data is performed
by selecting brightness-density conversion data
corresponding to the reading device relating to the
calibration from previously prepared plurality of
20 brightness-density conversion data.

15. An information processing apparatus for performing a
calibration for a printing apparatus, said apparatus
comprising:

25 reading control means for controlling a reading device
for reading a predetermined image printed by the printing
apparatus;

executing means for executing the calibration by
renewing brightness-density conversion data obtained
based on a reading property of the reading device, a
previously prepared predetermined reading property and a
5 previously prepared brightness-density conversion
condition corresponding to the predetermined reading
property; and

generating means for generating calibration data for
the calibration for the printing apparatus based on a
10 density measurement result measured by, under the control
of said reading control means, the reading device which
has been subject to calibration by said executing means.

16. An information processing apparatus as claimed in
15 claim 15, wherein said executing means renews
brightness-density conversion data by selecting
brightness-density conversion data corresponding to the
reading device relating to the calibration from previously
prepared plurality of brightness-density conversion data.

ABSTRACT OF THE DISCLOSURE

A calibration for a scanner, which is used as a densitometer, is carried out always with high accuracy.

- 5 More specifically, an image processing method of generating a conversion condition for a scanner which is used for reading an image and generating image data, is provided. The method including the steps of: obtaining a reading property of an object scanner based on image data
10 obtained by that the object scanner reads a chart, and generating the conversion condition for the object scanner based on the reading property of the object scanner, a previously prepared reading property of a standard scanner and a previously prepared brightness-density conversion
15 condition for the standard scanner.

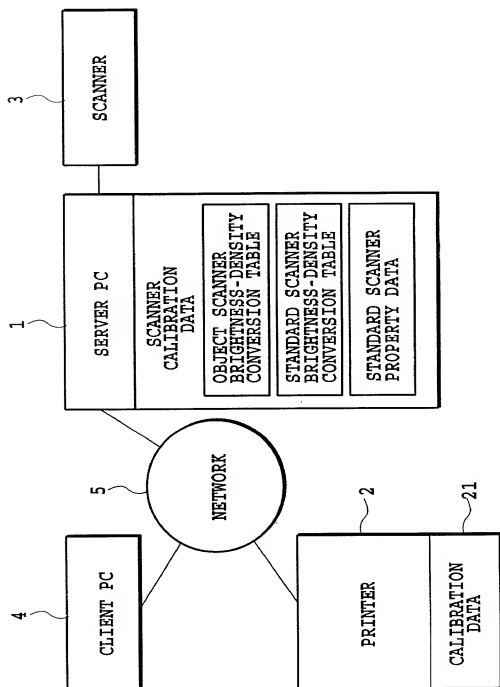


FIG.1

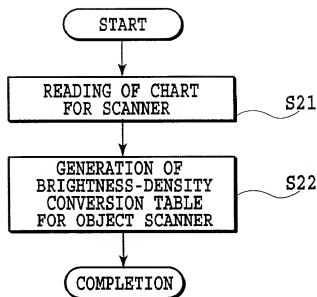


FIG.2

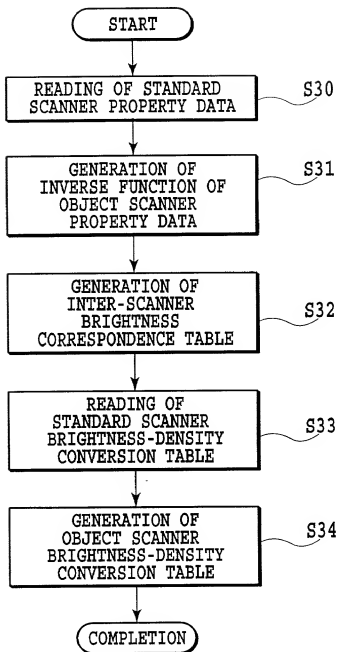


FIG.3

FIG.4

FIG.4A

FIG.4B

154

154

A

152

1	0	0	0	0	33	33	33	24	24	24	33	33	33	33	16	16	16	33	33	33	33	8	8	8	8	33	33	33	33
2	1	1	1	35	35	35	25	25	25	35	35	35	35	17	17	17	35	35	35	35	9	9	9	9	35	35	35	35	
3	2	2	2	37	37	37	26	26	26	37	37	37	37	18	18	18	37	37	37	37	10	10	10	10	37	37	37	37	
4	3	3	3	39	39	39	27	27	27	39	39	39	39	19	19	19	39	39	39	39	11	11	11	11	39	39	39	39	
5	4	4	4	41	41	41	28	28	28	41	41	41	41	20	20	20	41	41	41	41	12	12	12	12	41	41	41	41	
6	5	5	5	43	43	43	29	29	29	43	43	43	43	21	21	21	43	43	43	43	13	13	13	13	43	43	43	43	
7	6	6	6	45	45	45	30	30	30	45	45	45	45	22	22	22	45	45	45	45	14	14	14	14	45	45	45	45	
8	7	7	7	47	47	47	31	31	31	47	47	47	47	23	23	23	47	47	47	47	15	15	15	15	47	47	47	47	
9	8	8	8	49	49	49	0	0	0	49	49	49	49	24	24	24	49	49	49	49	16	16	16	16	49	49	49	49	
10	9	9	9	51	51	51	1	1	1	51	51	51	51	25	25	25	51	51	51	51	17	17	17	17	51	51	51	51	
11	10	10	10	53	53	53	2	2	2	53	53	53	53	26	26	26	53	53	53	53	18	18	18	18	53	53	53	53	
12	11	11	11	55	55	55	3	3	3	55	55	55	55	27	27	27	55	55	55	55	19	19	19	19	55	55	55	55	
13	12	12	12	57	57	57	4	4	4	57	57	57	57	28	28	28	57	57	57	57	20	20	20	20	57	57	57	57	
14	13	13	13	59	59	59	5	5	5	59	59	59	59	29	29	29	59	59	59	59	21	21	21	21	59	59	59	59	
15	14	14	14	61	61	61	6	6	6	61	61	61	61	30	30	30	61	61	61	61	22	22	22	22	61	61	61	61	
16	15	15	15	63	63	63	7	7	7	63	63	63	63	31	31	31	63	63	63	63	23	23	23	23	63	63	63	63	

FIG.4A

17	16	16	16	16	33	33	33	33	8	8	8	33	33	33	0	0	0	33	33	33	33	33	24	24	24	33	33	33	33
18	17	17	17	35	35	35	9	9	9	35	35	35	35	1	1	1	35	35	35	35	35	25	25	25	35	35	35	35	35
19	18	18	18	37	37	37	10	10	10	37	37	37	37	2	2	2	37	37	37	37	37	26	26	26	37	37	37	37	37
20	19	19	19	39	39	39	11	11	11	39	39	39	39	3	3	3	39	39	39	39	39	27	27	27	39	39	39	39	39
21	20	20	20	41	41	41	12	12	12	41	41	41	41	4	4	4	41	41	41	41	41	28	28	28	41	41	41	41	41
22	21	21	21	43	43	43	13	13	13	43	43	43	43	5	5	5	43	43	43	43	43	29	29	29	43	43	43	43	43
23	22	22	22	45	45	45	14	14	14	45	45	45	45	6	6	6	45	45	45	45	45	30	30	30	45	45	45	45	45
24	23	23	23	47	47	47	15	15	15	47	47	47	47	7	7	7	47	47	47	47	47	31	31	31	47	47	47	47	47
25	24	24	24	49	49	49	16	16	16	49	49	49	49	8	8	8	49	49	49	49	49	0	0	0	49	49	49	49	49
26	25	25	25	51	51	51	17	17	17	51	51	51	51	9	9	9	51	51	51	51	51	1	1	1	51	51	51	51	51
27	26	26	26	53	53	53	18	18	18	53	53	53	53	10	10	10	53	53	53	53	53	2	2	2	53	53	53	53	53
28	27	27	27	55	55	55	19	19	19	55	55	55	55	11	11	11	55	55	55	55	55	3	3	3	55	55	55	55	55
29	28	28	28	57	57	57	20	20	20	57	57	57	57	12	12	12	57	57	57	57	57	4	4	4	57	57	57	57	57
30	29	29	29	59	59	59	21	21	21	59	59	59	59	13	13	13	59	59	59	59	59	5	5	5	59	59	59	59	59
31	30	30	30	61	61	61	22	22	22	61	61	61	61	14	14	14	61	61	61	61	61	6	6	6	61	61	61	61	61
32	31	31	31	63	63	63	23	23	23	63	63	63	63	15	15	15	63	63	63	63	63	7	7	7	63	63	63	63	63



FIG. 5A




FIG. 5B



FIG. 5C




FIG. 5D




FIG. 5E


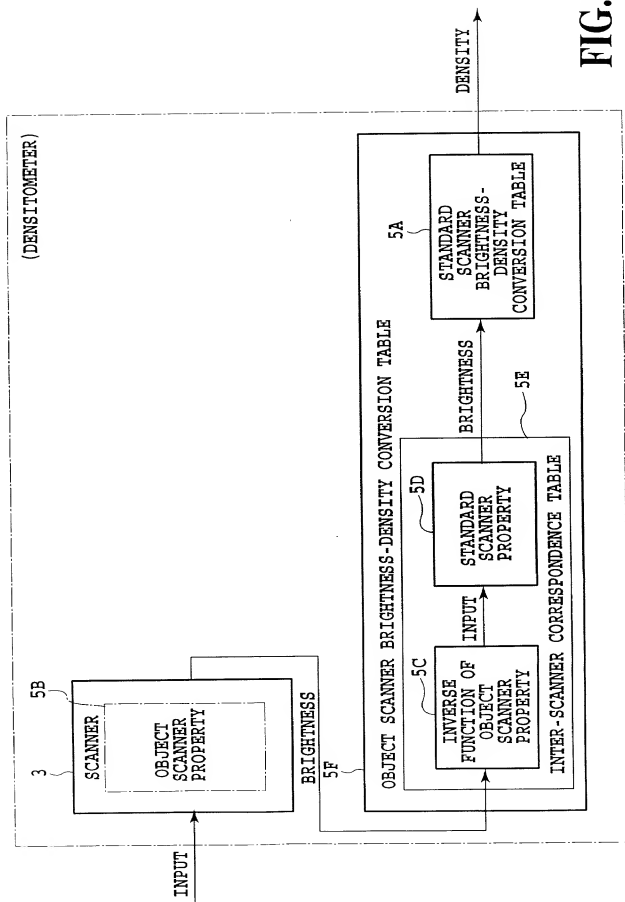


FIG. 5F



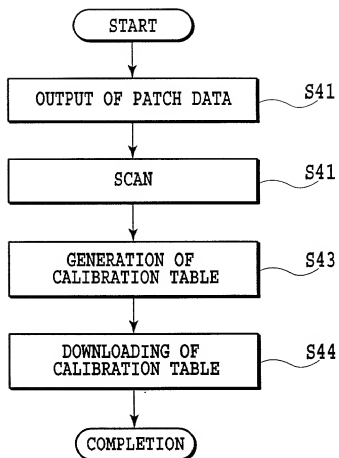


FIG.7

9/24


FIG. 8

FIG. 8A

FIG. 8B


61

FIG. 8A

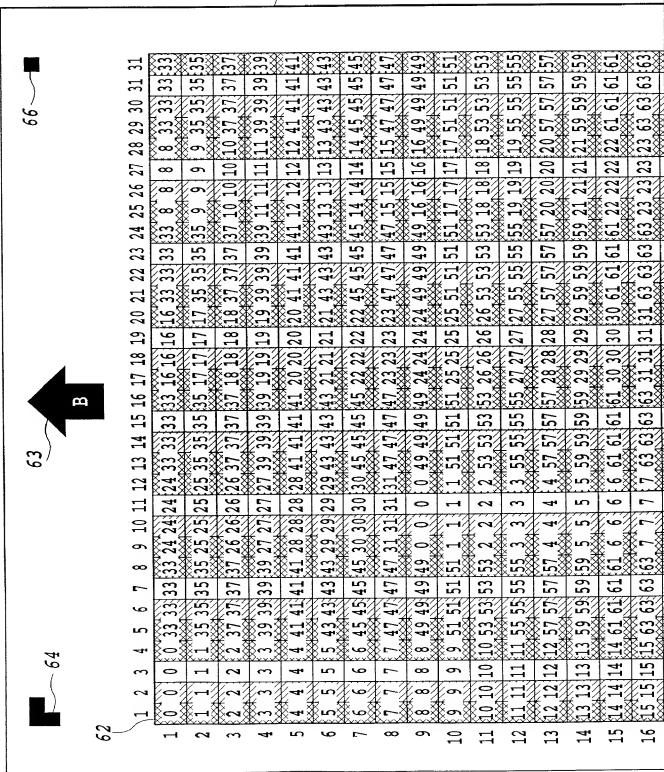

17	16	16	16	33	33	33	33	8	8	8	33	33	33	0	0	0	33	33	33	33	24	24	24	33	33	33	33
18	17	17	17	35	35	35	35	9	9	9	35	35	35	1	1	1	35	35	35	35	25	25	25	35	35	35	35
19	18	18	18	37	37	37	37	10	10	10	37	37	37	2	2	2	37	37	37	37	26	26	26	37	37	37	37
20	19	19	19	39	39	39	39	11	11	11	39	39	39	3	3	3	39	39	39	39	27	27	27	39	39	39	39
21	20	20	20	41	41	41	41	12	12	12	41	41	41	4	4	4	41	41	41	41	28	28	28	41	41	41	41
22	21	21	21	43	43	43	43	13	13	13	43	43	43	5	5	5	43	43	43	43	29	29	29	43	43	43	43
23	22	22	22	45	45	45	45	14	14	14	45	45	45	6	6	6	45	45	45	45	30	30	30	45	45	45	45
24	23	23	23	47	47	47	47	15	15	15	47	47	47	7	7	7	47	47	47	47	31	31	31	47	47	47	47
25	24	24	24	49	49	49	49	16	16	16	49	49	49	8	8	8	49	49	49	49	0	0	0	49	49	49	49
26	25	25	25	51	51	51	51	17	17	17	51	51	51	9	9	9	51	51	51	51	1	1	1	51	51	51	51
27	26	26	26	53	53	53	53	18	18	18	53	53	53	10	10	10	53	53	53	53	2	2	2	53	53	53	53
28	27	27	27	55	55	55	55	19	19	19	55	55	55	11	11	11	55	55	55	55	3	3	3	55	55	55	55
29	28	28	28	57	57	57	57	20	20	20	57	57	57	12	12	12	57	57	57	57	4	4	4	57	57	57	57
30	29	29	29	59	59	59	59	21	21	21	59	59	59	13	13	13	59	59	59	59	5	5	5	59	59	59	59
31	30	30	30	61	61	61	61	22	22	22	61	61	61	14	14	14	61	61	61	61	6	6	6	61	61	61	61
32	31	31	31	63	63	63	63	23	23	23	63	63	63	15	15	15	63	63	63	63	7	7	7	63	63	63	63

FIG.10B



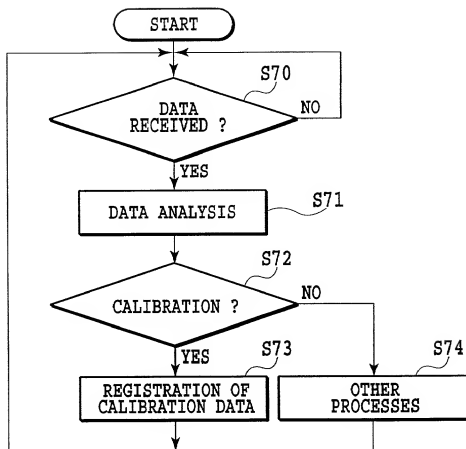


FIG.11

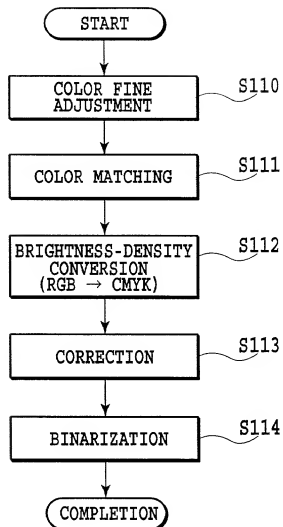


FIG.12

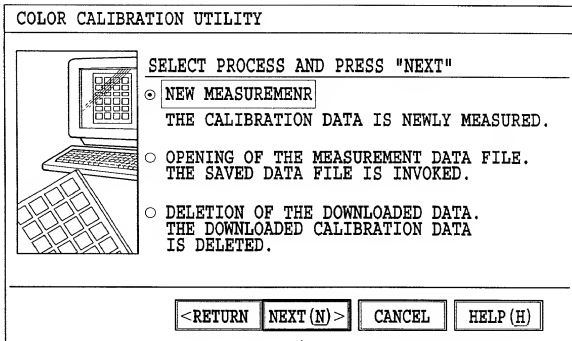


FIG.14

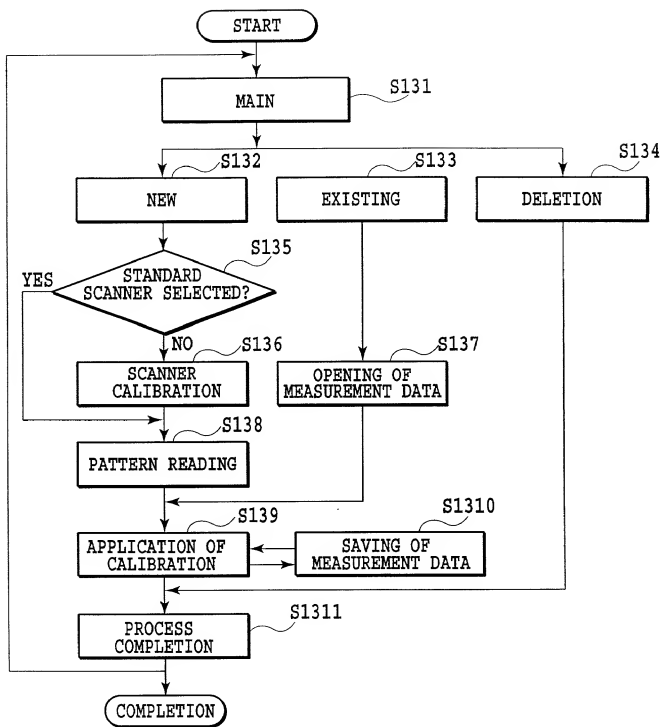


FIG.15

141

SELECT THE SCANNER.

SCANNER NAME:

142

The image shows a rectangular window with a title bar. Inside the window, the text 'SELECT THE SCANNER.' is displayed. Below it, the text 'SCANNER NAME:' is followed by a horizontal text input field. To the right of the input field is a small square button containing a downward-pointing triangle, indicating a dropdown menu. A label '141' with a curved line points to the title bar, and a label '142' with a curved line points to the input field.

FIG.16

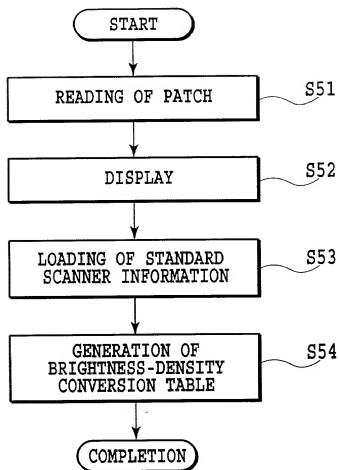


FIG.17

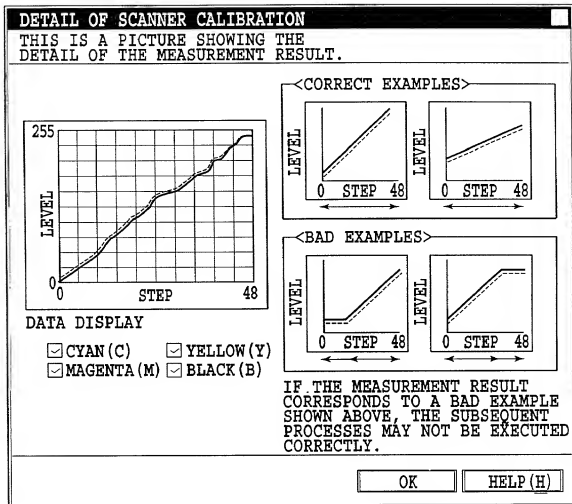


FIG.18

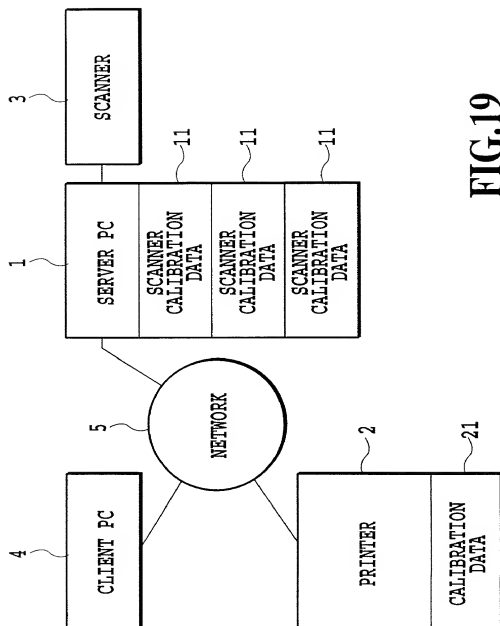


FIG.19

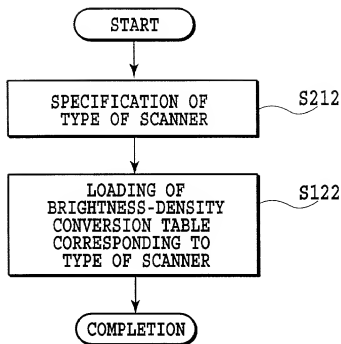


FIG.20

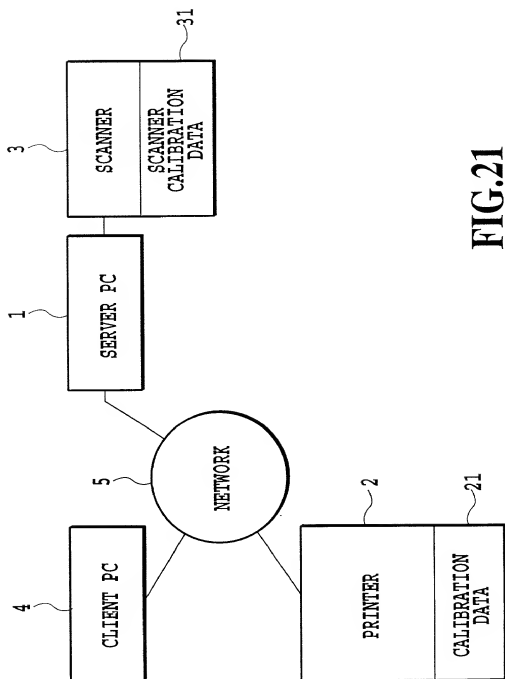


FIG.21

